


Size	L	D	D1	Y	T	f	Z	U	D2	d	Q	Z - UNC/UN
10"	9.84	19.69	10.83	4.41	8.27	0.16	3.15	5.12	1.26	0.40	6.50	4-UNC 3/4"-10
12"	9.84	19.69	10.83	4.41	8.27	0.16	3.15	5.12	1.42	0.40	6.50	4-UNC 3/4"-10
14"	9.84	19.69	10.83	4.41	8.27	0.16	3.15	5.12	1.57	0.40	6.50	4-UNC 3/4"-10

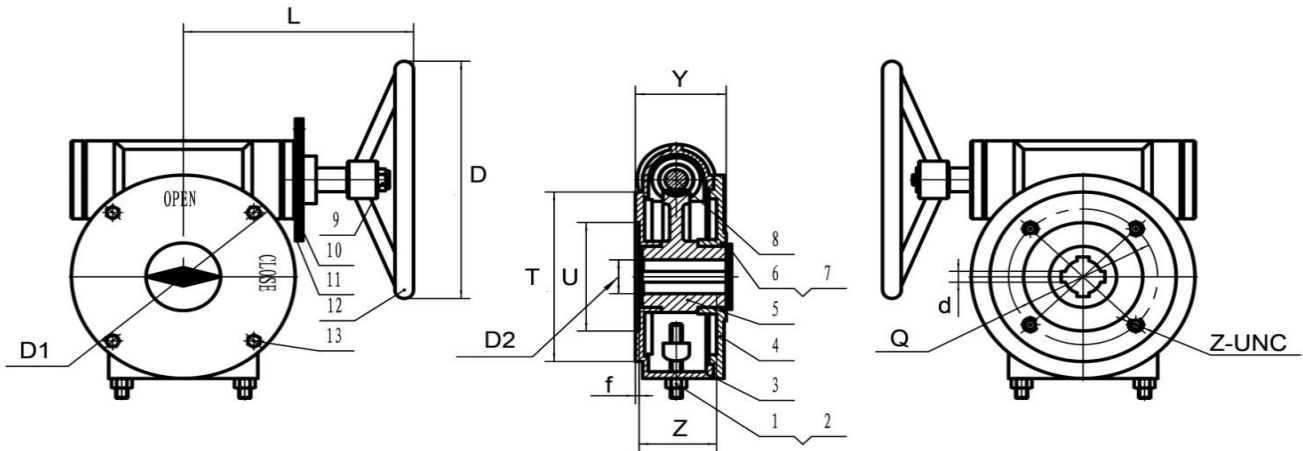

No.	PART	QTY	MATERIAL
1	Adjusting Screw	2	SS316
2	Nut	2	SS316
3	Worm Gear Box	1	C95800
4	Cover	1	C95800
5	Worm Gear	1	C95800
6	Dial	1	SS316
7	Bolts	2	SS316
8	Worm Gear Shaft	1	SS316
9	Handwheel Lock Nut	1	SS316
10	End Cap	1	C95800
11	Locking Plate	2	SS316
12	Handwheel	1	C95800
13	Bolts	4	SS316

Pressure Rating:	<b>DIMENSIONAL DATA SHEET</b> <b>Series 15N</b> <b>Worm Gear Operator</b> <b>Bronze Body / Bronze Worm Gear</b> <b>10" -14"</b> <b>Specification MIL-V-24624</b> <b>Shock MIL-S- 901D Grade A</b> <b>Vibration Test MIL-STD-167-1A</b>	Material Reference: C95800+SS316
Customer/Project:		Part No.: 15-N86XX
Cage Code: 6SPR5		Drawing No.: FL 15N-02XX-R1
Drawn By: TEM	Approved by: DAB	Rev. # <b>B</b>
		Rev. Date 03/11/15